




Humidity Sensor

For surface mount technology


Model. CL-M7R-SMT

The CL-M7R-SMT humidity sensor offers a high value humidity solution for use on PCB assemblies. The sensor's small size and packaged for ease of mounting saves on installation cost and valuable board space.

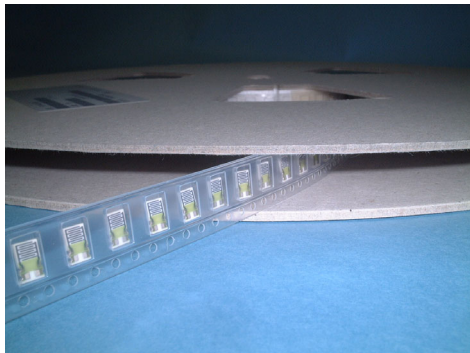

Feature

- Wide Humidity detecting range
- Outstanding repeatability
- Long-term stability
- Low hysteresis
- Small and light-weight


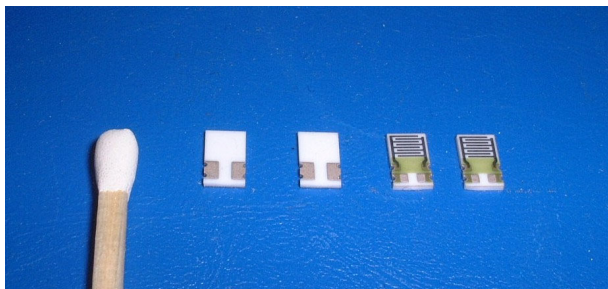


Application

- Air-conditioner, Humidifier, Dehumidifier
- Humidity Controller, Humidity Transmitter
- Hygrometer, Hygro-recorder
- Copying machine
- Clock, Weather-forecast barometer

Characteristics

Humidity Sensor element	HPR-MQ-M7R
Rated Voltage	1 Vrms (Max.5 Vrms)
Rated Power	0.2 mW
Operating Temperature Range	0 to 60deg. C
Operating Humidity Range	95%rh or less
Operating Frequency Range	500 Hz to 2 kHz
Standard Humidity Resistance	20k Ohm (at 25deg. C, 60%rh, 1kHz)
Humidity Measurement Accuracy	±5 %rh (at 25 deg. C , 60%rh, 1kHz)
Temperature Dependence	0.6%rh/deg. C

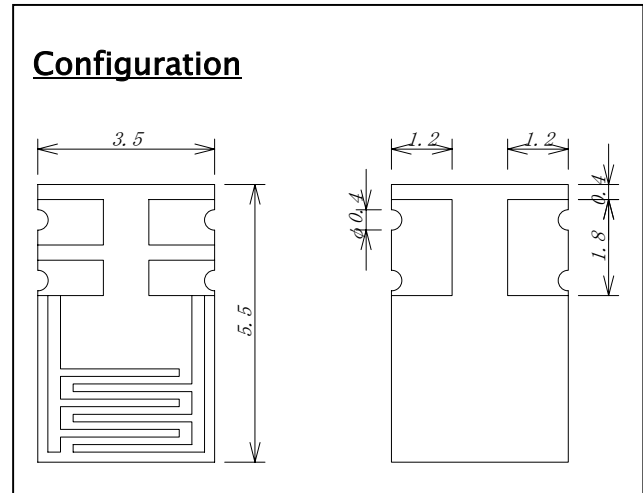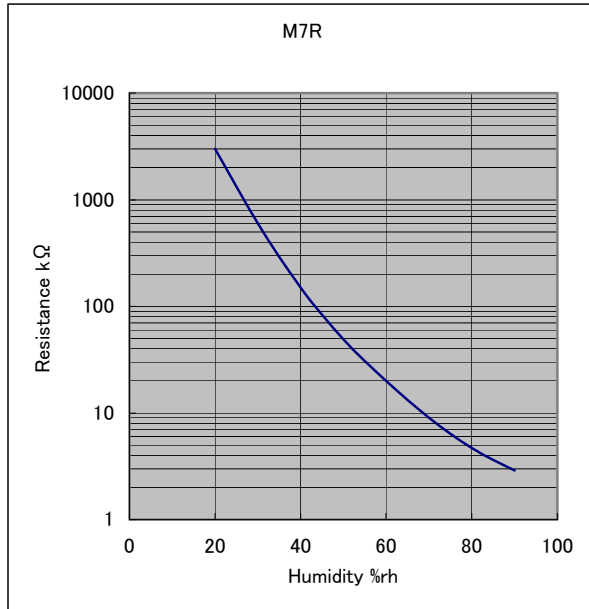Relative humidity - Resistance characteristics**Measuring conditions :**

Temperature =25deg.c, Voltage=1Vrms, Frequency=1kHz, Wave form=Sine wave
 Leave the sensor in dry air at 25 deg C, 0 %rh for 30 minutes, than leave it at 60 %rh
 and measure its resistance after 15 minutes.

Packaging

2000 sensors per reel are packaged for use with most pick and place manufacturing equipment.

Remark; We have the right to revise specifications and product configurations without notice.

Caution for use

- ! Avoid inputting DC voltage directly to Humidity Sensor. Please use AC voltage. (50% duty cycle)
- ! Avoid condensation and drenching.
- ! Avoid application of the Humidity Sensor in the salt, inorganic gases and organic gases.



Contact :

Shinyei Corporation of America

11 East 44th St., Ste.700, New York, NY 10017

TEL (212)682-4610 FAX (212)286-8426

E-mail: tony.tokuya@sca-shinyei.com